

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/091902 A2

(51) International Patent Classification: Not classified

(21) International Application Number: PCT/US2005/006510

(22) International Filing Date: 2 March 2005 (02.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/549,793 3 March 2004 (03.03.2004) US
60/559,119 2 April 2004 (02.04.2004) US

(71) Applicant (for all designated States except US): INTELLECTUAL PROPERTY HOLDINGS, LLC [US/US]; 127 Public Square, Suite 2700, Cleveland, OH 44114 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SANE, Ajit, Y. [US/US]; 3535 Trails End Drive, Medina, OH 44256 (US). BUDINGER, Bruce, O. [US/US]; 17100 Wood Acre Trail, Chagrin Falls, OH 44023 (US). CHURBY, Scott, A. [US/US]; 212 Mill Street, Lodi, OH 44254 (US). MOORE, Dan, T., III [US/US]; 2626 Fairmount Blvd.,

Cleveland Heights, OH 44106 (US). EUCKER, James, L. [US/US]; 32998 Woodspring Circle, North Ridgeville, OH 44039 (US).


(74) Agents: SOLOMON, Steven, J. et al.; Pearne & Gordon LLP, 1801 East 9th Street, Suite 1200, Cleveland, OH 44114-3108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: HIGHLY INSULATED EXHAUST MANIFOLD

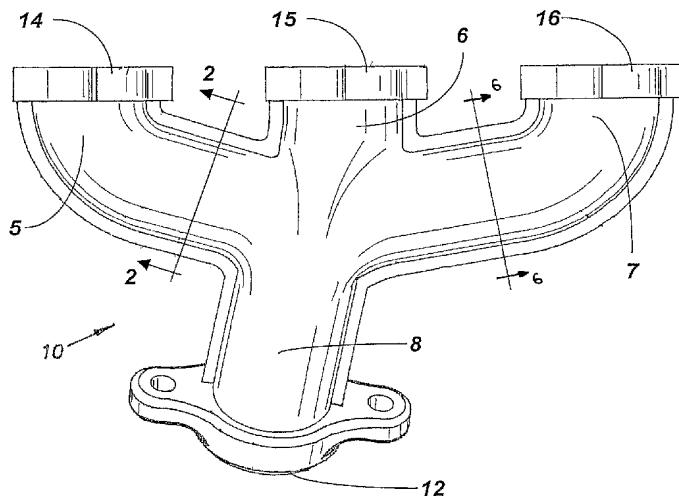

WO 2005/091902 A2

(57) Abstract: An exhaust manifold is provided having a ceramic inner layer defining an exhaust gas passageway, and a composite insulation zone that is highly thermally insulating. In one embodiment, the composite insulation zone includes a plurality of metallic foils in alternating arrangement with layers having insulating qualities. In the composite insulation zone, the layers having insulating qualities can include ceramic layers, evacuated spaces, microsphere layers including substantially evacuated microspheres, or a combination of these. A novel sealing arrangement also is provided for sealing the ceramic inner and metallic outer layers of a metal-encased-ceramic exhaust manifold at a location adjacent the inlet port of a runner of the manifold. A sealing gasket is substantially completely encased within or shielded by the metallic outer layer, so as not to contact the cylinder head when assembled to an internal combustion engine.



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*